
- $$\begin{split} A &= \text{height from floor to chimney connection upwards} \\ B &= \text{height from floor to } \textit{c/c} \text{ chimney connection rear} \\ C &= \text{height from floor to air inlet} \\ D &= \text{height from floor to lower edge of hatch} \end{split}$$

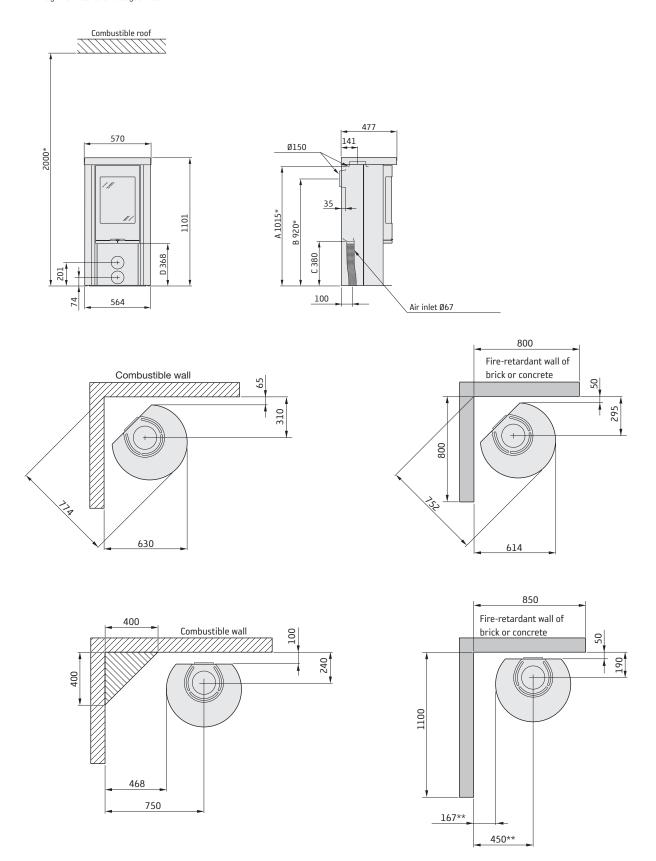

- If the stove is placed on a hearth plate made of glass for example (accessory), the height from the floor is affected by a distance corresponding to the thickness of the hearth plate, for a free standing glass hearth plate this is 10 mm.
- To prevent discolouration of painted non-flammable walls we recommend that the same side distance as to combustible walls is used.